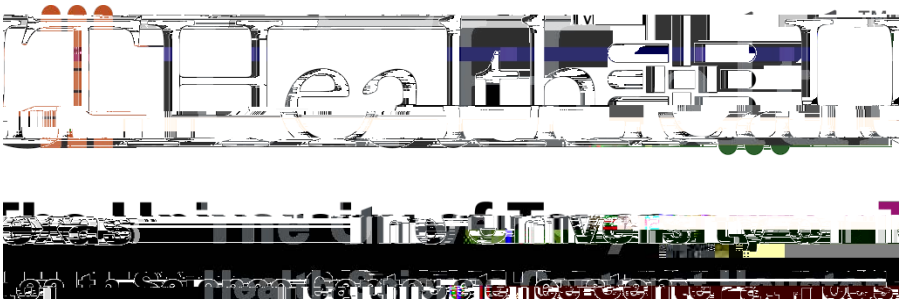

The University of Texas Health Science Center at Houston

Respiratory Protection Manual

I. Foreword

The University of Texas Health Science Center at Houston (UTHSC-H) has a fundamental commitment and responsibility to protect the health and safety of its faculty, students, employees, and the visiting public when participating in official activities. Many occupational diseases can be effectively prevented by minimizing or eliminating the breathing of air that may be contaminated with harmful dusts, fogs, fumes, mists, gases, smokes, sprays, or vapors. This shall be accomplished as far as feasible by accepted engineering control measures such as enclosure or confinement of the operation, general and local ventilation, and substitution of less toxic materials. When effective engineering controls are not feasible, or while they are being instituted, it is the aim of this program to ensure that respiratory protection is provided, utilized, and maintained in an appropriate and safe manner.

II. Purpose

The purpose of this program is to ensure the protection of all UTHSC-H personnel and students from respiratory hazards through the proper use of approved respirators. Job-specific respirators shall be provided by UTHSC-H and are to be used when engineering controls for respiratory hazards are not feasible or ineffective, while engineering controls are being installed or repaired, and for emergency or other temporary situations. Voluntary respirator use (when exposures are below the permissible exposure limit) is permitted at the request of the employee or student and upon review by Environmental Health and Safety and subsequent to a medical evaluation if necessary (See Appendix D). The procedures set forth in this program comply fully with the requirements of the Occupational Safety and Health Administration's (OSHA) 29 CFR 1910.134 (Respiratory Protection Standard, revised April 8, 1998). Procedures apply to all UTHSC-H faculty, staff, and students. Non-UTHSC-H personnel working at the University of Texas Health Science Center at Houston must observe procedures that are equivalent to or exceed the requirements of the UTHSC-H Respiratory Protection Program.

III. Responsibilities

A. Environmental Health & Safety will:

a. Manage the Respiratory Protection Program. The Vice President of Safety, Health, Environment and Risk Management will serve as the Respiratory Protection Program administrator.
b. Provide training
c. Conduct fit testing
d. Maintain documentation of training and fit testing
e. Recommend appropriate respirators and cartridges
f. Conduct periodic monitoring to assess concentrations of airborne contaminants
g. Conduct periodic inspections of respirator storage and use, and ensure that these inspections are properly documented

B. UT Employee Health Services will:

a. Perform and document initial and subsequent medical surveillance of all respirator wearers at no cost to the student/employee

C. Employee Supervisors will:

a. Identify personnel who may need to utilize respiratory protection
b. Purchase appropriate respirators, cartridges, and approved replacement parts at no cost to student/employee
c. Ensure that employees have had medical surveillance as required by this program
d. Ensure that employees are properly trained before utilizing respiratory protection, and that employees receive any required refresher training (at least annually)
e. Contact EH&S to perform any initial or follow-up monitoring
f. Report any problems with respiratory protection to EH&S
g. Ensure that employees are up-to-date for fit testing (annual requirement)
h. Ensure that employees who are required to wear a respirator because of potential exposure, do so, as a condition of employment
i. Ensure that any SCBA tanks have had hydrostatic testing as per manufacturer's recommendations, and that this has been properly documented

D. Respirator Wearer will:

a. Clean / inspect respirator before and after each use. Document using Appendix F.
b. Store respirator in a re-sealable plastic bag in a clean area away from possible contaminants
c. Use respirator in accordance with manufacturer's recommendations
d. Properly wear respirator and all related equipment as trained

B. Atmosphere-Supplying Respirators

a. Description

Atmosphere-Supplying respirators provide the user with breathable air independent of the ambient air. These types of respirators may be used to provide protection in oxygen-deficient atmospheres and in highly toxic atmospheres. There are several different types of atmosphere-supplying respirators that offer a superior degree of protection against atmospheric contaminants and require specialized training for use:

1. Self-Contained Breathing Apparatus (SCBA)

The self-contained breathing apparatus (SCBA) is a unit that allows the user to carry their breathing atmosphere with them. SCBA's are normally used when there is a short-term need to enter and escape from atmospheres that are or may be immediately dangerous to life and health (IDLH). The most important limitation associated with using the SCBA is the oxygen capacity of the device. Most SCBA's only have a 15-30 minute oxygen supply, which may be rapidly depleted if the work rate increases or if the atmospheric pressure changes.

2. Supplied Air Respirator (SAR)

The supplied air respirator (SAR) is a unit whose use is not limited to the amount of oxygen one can carry with them into a hazardous atmosphere. SAR's are typically in line with a high-volume/high pressure breathing air cylinder cascade. Alternatively, these respirators may be in line with an air blower, which blows uncontaminated ambient air into the face piece. These types of respirators, regardless of mode of operation, allow the user to remain in the contaminated atmosphere much longer than would be possible with an SCBA. These units are lightweight but limit the range of user mobility. They are normally used when there are extended work periods required in atmospheres that are not IDLH.

3. Combination Respirators

A combination air-line respirator with auxiliary SCBA is available which provides users with the highest degree of protection possible. These units allow the wearer to escape dangerous atmospheres if the SAR fails during use. These respirators are used when there are extended work periods required in atmospheres that are or may be IDLH.

Table 1: OSHA Assigned Protection Factors (APF)

Type of Respirator	APF
Air-Purifying	
Filtering Face piece	10
Half-Mask	10
Full-Face piece	50
Powered Air-Purifying	
Half-Mask	50
Full-Face piece	1000
Loose-Fitting Face piece	25
Helmet	25
Hood	1000
Air-Line: Demand mode	
Half-Mask	10
Full Facepiece	50
Continuous Flow	50
Pressure Demand	50
Air-Line: Continuous Flow mode	
Half-Mask	50
Full Facepiece	1000
Loose-Fitting Face piece	25
Helmet	25
Hood	1000
Air-Line: Pressure Demand	
Half-Mask	50
Full Facepiece	1000
SCBA: Demand	
Full Facepiece	50
Helmet or Hood	50
SCBA: Pressure Demand	
Full Facepiece	10000
Helmet or Hood	10000

VIII. Selection of Respirators

Only respirators that have been certified by the National Institute for Occupational Safety and Health (NIOSH) will be used in the UTHSC-H Respirator Program. Respirators are certified as an assembly, and substitution of parts from other manufacturers or models is strictly prohibited. The respirator shall be used in compliance with the conditions of its certification, and the NIOSH label on the cartridge or filter must not be obscured, removed, or defaced while it is in service. A respirator will be issued to an individual for his or her exclusive use and shall not be used by another employee or student.

Selection of appropriate respirators will be based on the specific respiratory hazard(s) to which the worker is exposed and workplace and user factors that affect respirator performance and reliability (29CFR 1910.134 (d)(1)(i)). In order to assist employees in determining exposure levels, EH&S will conduct area monitoring to determine workplace hazards such as oxygen deficiency and air contamination by particulates, vapors, or gases. Half-face and full-face air-purifying respirators equipped with the appropriate respirator filters/cartridges will be used to provide protection against specific hazards in atmospheres that are NOT:

- Oxygen deficient
- Immediately dangerous to life and health (IDLH)
- Exceeding the limitations of the selected respirator filters or cartridges

When exposure cannot be identified or reasonably estimated, the atmosphere shall be considered IDLH. In atmospheres where any of the aforementioned hazards exist, employees shall use either a self-contained breathing apparatus (SCBA) or a positive pressure supplied air respirator equipped with an emergency escape pack.

IX. Training

To ensure the proper and safe use of a respirator, each user will be thoroughly trained at

e. SCBA's

1. Require an inspection of the air and oxygen cylinders to assure that the cylinder pressure is maintained at or above 90% of the manufacturer's recommended pressure level and that the regulator and low pressure warning devices function properly. The warning device must be activated and heard by the person performing the inspection.

B. Seal Checks

The wearer of a respirator equipped with a tight fitting face piece must check the seal of the face piece routinely prior to each entry into a potentially contaminated area. The seal may also be checked during use if the user questions the fit. Either the positive and negative pressure checks listed below or the respirator manufacturer's recommended user seal check method shall be used. User seal checks are not substitutes for qualitative or quantitative fit tests.

a. Positive Pressure Check

Close off the exhalation valve with the palm of the hand and exhale gently into the face piece. The face fit is considered satisfactory if a slight positive pressure can be built up inside the face piece without any evidence of air leakage at the seal.

b. Negative Pressure Check

Close off the inlet opening of the canister(s) or cartridge(s) by covering with the palms of the hands and inhale gently so that the face piece collapses slightly. Hold the breath for ten seconds. The face piece should remain slightly collapsed with no inward leakage.

C.

d. When the cleaner used does not contain a disinfecting agent, respirator components should be immersed for two minutes in one of the following:
   1. Hypochlorite solution (50ppm of chlorine) made by adding approximately one milliliter of laundry bleach to one liter of water at 43°C/110°F; or
   2. Aqueous solution of iodine (50ppm iodine) made by adding approximately 0.8 milliliters of tincture of iodine (6-8 grams ammonium and/or potassium iodide/100 cc of 45% alcohol) to one liter of water at 43° C / 110° F; or
   3. Other commercially available cleansers of equivalent disinfectant quality when used as directed, if their use is recommended or approved by the respirator manufacturer.
   4. Rinse components thoroughly in clean, warm (43°C/110°F maximum) water, preferably running water. Drain. The importance of thorough rinsing cannot be overemphasized. Detergents or disinfectants that dry on face pieces may result in dermatitis. In addition, some disinfectants may cause deterioration of rubber or corrosion of metal parts if not completely removed.
   5. Components should be hand-dried with a clean, lint-free cloth or air-dried.
   6. Reassemble face piece, replacing filters, cartridges, and canisters wpi c 3s s (p)-l(c)4owhe alotat sradteion of s not (a)41 (hooulpe()-1ct)-2 (on ofa)-

Respirator users may no longer rely on warning properties as the sole basis for determining change schedules, however, respirator users should be trained to understand that abnormal odor or irritation is evidence that respirator cartridges need to be replaced. When there is a mix of contaminants, the service life will be based on the contaminant with the shortest breakthrough time. Many manufacturers are now installing End of Service Life Indicators (ESLI's) on respirator cartridges. An ESLI is a system that changes color, therefore alerting the user that the cartridge must be replaced. The respirator user must strictly follow the manufacturer's guidelines to prevent health risks. The following tables contain current examples:

Table 3: Chemical Cartridge and Canister Change-Out Schedule

Chemical	Recommended Change Out Schedule
Acrylonitrile 1910.1045 (h)(2)(ii)	End-of-

Methylene Chloride 1910.1052 (g)(2)(ii)	Canisters may only be used for emergency escape and must be replaced after use.

Table 4: Particulate Filter Change-Out Schedule

N-series: use for protection against solid and water based particles - N95 - N99 - N100	All N series filters have no specific service time. They may be used multiple shifts and may continue until a breathing resistance is noted or become visibly soiled. **OR** At the first sign of physical damage.
R-series: ~~use for~~ protection against ~~of a~~ any particles (including oil aerosols). - R95 - R99 - R100	All R series filters have a useful service time of an 8-hour shift.
P-series: use for protection against any particles (including oil aerosols).	

includes supplied-air respirators (SARs) and self-contained breathing apparatus (SCBA) units

C. Canister or cartridge means a container with a filter, sorbent, or catalyst, or combination of these items, which removes specific contaminants from the air passed through the container.

D. Demand respirator means an atmosphere-supplying respirator that admits breathing air to the face piece only when negative pressure is created inside the face piece by inhalation.

E. Emergency situation means any occurrence such as, but not limited to, equipment failure, rupture of containers, or failure of control equipment that may or does result in an uncontrolled significant release of an airborne contaminant.

F. Employee exposure means exposure to a concentration of an airborne contaminant that would occur if the employee were not using respiratory protection.

G. End-of-servicelife indicator (ESLI) means a system that warns the respirator user of the approach of the end of adequate respiratory protection, for example, that the sorbent is approaching saturation or is no longer effective.

H. Escapeonly respirator means a respirator intended to be used only for emergency exit.

I. Filter or air purifying element means a component used in respirators to remove solid or liquid aerosols from the inspired air.

J. Filtering face piece (dust mask) means a negative pressure particulate respirator with a filter as an integral part of the face piece or with the entire face piece composed of the filtering medium.

K. Fit factor means a quantitative estimate of the fit of a particular respirator to a specific individual, and typically estimates the ratio of the concentration of a substance in ambient air to its concentration inside the respirator when worn.

L. Fit test means the use of a protocol to qualitatively evaluate the fit of a respirator on an individual. (See also Qualitative fit test QLFT and Quantitative fit test QNFT.)

N. High efficiency particulate air (HEPA) filter means a filter that is at least 99.97% efficient in removing monodisperse particles of 0.3 micrometers in diameter. The equivalent NIOSH 42 CFR 84 particulate filters are the N100, R100, and P100 filters.

O. Hood means a respiratory inlet covering that completely covers the head and neck and may also cover portions of the shoulders and torso.

P. Immediately dangerous to life and health (IDLH) means an atmosphere that

Y. Qualitative Fit Test (QLFT) means a pass/fail fit test to assess the adequacy of respirator fit that relies on [illegible]

Appendix A - Fit Test Procedures

Appendix A to § 1910.134: Fit Testing Procedures (Mandatory)

Part I. OSHA-Accepted Fit Test Protocols

A. Fit Testing Procedures--General Requirements

The employer shall conduct fit testing using the following procedures. The requirements in this appendix apply to all OSHA- accepted fit test methods, both QLFT and QNFT.

1. The test subject shall be allowed to pick the most acceptable respirator from a sufficient number of respirator models and sizes so that the respirator is acceptable to, and correctly fits, the user.

2. Prior to the selection process, the test subject shall be shown how to put on a respirator, how it should be positioned on the face, how to set strap tension and how to

12. Exercise regimen. Prior to the commencement of the fit test, the test subject shall be given a description of the fit test and the test subject's responsibilities during the test procedure. The description of the process shall include a description of the test exercises that

Rainbow Passage

When t

(a) Odor Threshold Screening

Odor threshold screening, performed without wearing a respirator, is intended to determine if the individual tested can detect the odor of isoamyl acetate at low levels.

(1) Three 1 liter glass jars with metal lids are required.

(2) Odor-

(9) The mixtures used in the IAA odor detection test shall be prepared in an area separate from where the test is performed, in order to prevent olfactory fatigue in the subject.

(10) If the test subject is unable to correctly identify the jar containing the odor test solution, the IAA qualitative fit test shall not be performed.

(11) If the test subject correctly identifies the jar containing the odor test solution, the test subject may proceed to respirator selection and fit testing.

(b) Isoamyl Acetate Fit Test

(7) If at any time during the test, the subject detects the banana-like odor of IAA, the test is failed. The subject shall quickly exit from the test chamber and leave the test area to avoid olfactory fatigue.

(8) If the test is failed, the subject shall return to the selection room and remove the respirator. The test subject shall repeat the odor sensitivity test, select and put on another respirator, return to the test area and again begin the fit test procedure described in (b) (1) through (7) above. The process continues until a respirator that fits well has been found. Should the odor sensitivity test be failed, the subject shall wait at least 5 minutes before retesting. Odor sensitivity will usually have returned by this time.

(9) If the subject passes the test, the efficiency of the test procedure shall be demonstrated by having the subject break the respirator face seal and take a breath before exiting the chamber.

(10) When the test subject leaves the chamber, the subject shall remove the saturated towel and return it to the person conducting the test, so that there is no significant IAA concentration buildup in the chamber during subsequent tests. The used towels shall be kept in a self-sealing plastic bag to keep the test area from being contaminated.

3. Saccharin Solution Aerosol Protocol

The entire screening and testing procedure shall be explained to the test subject prior to the conduct of the screening test.

(a) Taste threshold screening. The saccharin taste threshold screening, performed without wearing a respirator, is intended to determine whether the individual being tested can detect the taste of saccharin.

(1) During threshold screening as well as during fit testing, subjects shall wear an enclosure about the head and shoulders that is approximately 12 inches in diameter by 14 inches tall with at least the front portion clear and that allows free movements of the head when a respirator is worn. An enclosure substantially similar to the 3M hood assembly, parts # FT 14 and # FT 15 combined, is adequate.

(2) The test enclosure shall have a 3/4-inch (1.9 cm) hole in front of the test subject's nose and mouth area to accommodate the nebulizer nozzle.

(3) The test subject shall don the test enclosure. Throughout the threshold screening test, the test subject shall breathe through his/her slightly open

(4) Using a DeVilbiss Model 40 Inhalation Medication Nebulizer or equivalent, the test conductor shall spray the Threshold Check Solution into the enclosure. This Nebulizer shall be clearly marked to distinguish it from the fit test solution nebulizer.

(5) The Threshold Check Solution is prepared by adding 13.5 milligrams of Bitrex to 100 ml of 5% salt (NaCl) solution in distilled water.

(6) To produce the aerosol, the nebulizer bulb is firmly squeezed so that the bulb collapses completely, and is then released and allowed to fully expand.

(7) An initial ten squeezes are repeated rapidly and then the test subject is asked whether the Bitrex can be tasted. If the test subject reports tasting the bitter taste during the ten squeezes, the screening test is completed. The taste threshold is noted as ten regardless of the number of squeezes actually completed.

(8) If the first response is negative, ten more squeezes are repeated rapidly and the test subject is again asked whether the Bitrex is tasted. If the test subject reports tasting the bitter taste during the second ten squeezes, the screening test is completed. The taste threshold is noted as twenty regardless of the number of squeezes actually completed.

(9) If the second response is negative, ten more squeezes are repeated rapidly and the test subject is again asked whether the Bitrex is tasted. If the test subject reports tasting the bitter taste during the third set of ten squeezes, the screening test is completed. The taste threshold is noted as thirty regardless of the number of squeezes actually completed.

(10) The test conductor will take note of the number of squeezes required to solicit a taste response.

(11) If the Bitrex is not tasted after 30 squeezes (step 10), the test subject is unable to taste Bitrex and may not perform the Bitrex fit test.

(12) If a taste response is elicited, the test subject shall be asked to take note of the taste for reference in the fit test.

(13) Correct use of the nebulizer means that approximately 1 ml of liquid is used at a time in the nebulizer body.

(14) The nebulizer shall be thoroughly rinsed in water, shaken to dry, and refilled at least each morning and afternoon or at least every four hours.

This qualitative fit test uses a person's response to the irritating chemicals released in the "smoke" produced by a stannic chloride ventilation smoke tube to detect leakage into the respirator.

(a) General Requirements and Precautions

properties of the smoke. The test operator shall carefully direct a small amount of the irritant smoke in the test subject's direction to determine that he/she can detect it.

(c) Irritant Smoke Fit Test Procedure

(1) The person being fit tested shall don the respirator without assistance, and perform the required user seal check(s).

(2) The test subject shall be instructed to keep his/her eyes closed.

(3) The test operator shall direct the stream of irritant smoke from the smoke tube toward the faceseal area of the test subject, using the low flow pump or the squeeze bulb. The test operator shall begin at least 12 inches from the face piece and move the smoke stream around the whole perimeter of the mask. The operator shall gradually make two more passes around the

(43 (2))5 ( )-10 3f the opers10 (e)4 (i)-5 ( )-2 (ng)10 (t)-2 (e)4 (s)-1 (t)-2

(53 (2))3 (T)1 (t)-e54i9dr-2 (e)4 (rc0 (e)4 (i)-1 (s)-1 (e)4 (s)-)4 (i)d2 (9

(83 (2))5 ( )-10 32) a-4 (r)-7 (ee)4 paon-1 (s)-1 (e)isr oeed i ng tissec4

excess of an established exposure limit for the test agent at any time during the testing process, based upon the length of the exposure and the exposure limit duration.

(6) The sampling port on the test specimen respirator shall be placed and constructed so that no leakage occurs around the port (e.g., where the respirator is probed), a free air flow is allowed into the sampling line at all times, and there is no interference with the fit or performance of the respirator. The in-mask sampling device (probe) shall be designed and used so that the air sample is drawn from the breathing zone of the test subject, midway between the nose and mouth and with the probe extending into the face piece cavity at least 1/4 inch.

(7) The test setup shall permit the person administering the test to observe the test subject inside the chamber during the test.

(8) The equipment generating the test atmosphere shall maintain the concentration of test agent constant to within a 10 percent variation for the duration of the test.

(9) The time lag (interval between an event and the recording of the event on the strip chart or computer or integrator) shall be kept to a minimum. There shall be a clear association between the occurrence of an event and its being recorded.

(10) The sampling line tubing for the test chamber atmosphere and for the respirator sampling port shall be of equal diameter and of the same material. The length of the two lines shall be equal.

(11) The exhaust flow from the test chamber shall pass through an appropriate filter (i.e., high efficiency particulate filter) b a<-1 (o)-41/-2 (c)4 (h)-10 nimu<

(1) When performing the initial user seal check using a positive or negative pressure check, the sampling line shall be crimped closed in order to avoid air pressure leakage during either of these pressure checks.

(2) The use of an abbreviated screening QLFT test is optional. Such a test may be utilized in order to quickly identify poor fitting respirators that passed the positive and/or negative pressure test and reduce the amount of QNFT time. The use of the CNC QNFT instrument in the count mode is another optional method to obtain a quick estimate of fit and eliminate poor fitting respirators before going on to perform a full QNFT.

(3) A reasonably stable test agent concentration shall be measured in the test chamber prior to testing. For canopy or shower curtain types of test units, the determination of the test agent's stability may be established after the test subject has entered the test environment.

(4) Immediately after the subject enters the test chamber, the test agent

concentration measured before and after each exercise or the true average measured continuously during the respirator sample.

(iii) The concentration of the challenge agent inside the respirator shall be determined by one of the following methods:

(A) Average peak penetration method means the method of determining test agent penetration into the respirator utilizing a strip chart recorder, integrator, or computer. The agent penetration is determined by an average of the peak heights on the graph or by computer integration, for each exercise except the grimace exercise. Integrators or computers that calculate the actual test agent penetration into the respirator for each exercise will also be co (ir)5 ored contnvi(e)-6 4 (u)w therequ-1 (pi)-2 (e-1 (a)4 (m-6 (ge)4 (nt)-2 (s)-4 (determining test agent penetration io the respiratose Td [(d)(t)-12 ((m)-r)4co uTd (m

(6) The test subject shall be instructed to perform the exercises in section I. A. 14. of this appendix.

(7) After the test exercises, the test subject shall be questioned by the test conductor regarding the comfort of the respirator upon completion of the protocol. If it has become unacceptable, another model of respirator shall be tried.

(b) Portacount Test Instrument

(1) The Portacount will automatically stop and calculate the overall fit factor for the entire set of exercises. The overall fit factor is what counts. The Pass or Fail message will indicate whether or not the test was successful. If the test was a Pass, the fit test is over.

(2) Since the pass or fail criterion of the Portacount is user programmable, the test operator shall ensure that the pass or fail criterion meet the requirements for minimum respirator performance in this Appendix.

(3) A record of the test needs to be kept on file, assuming the fit test was successful. The record must contain the test subject's name; overall fit factor; make, model, style, and size of respirator used; and date tested.

4. Controlled negative pressure (CNP) quantitative fit testing protocol.

The CNP protocol provides an alternative to aerosol fit test methods. The CNP fit test method technology is based on exhausting air from a temporarily sealed respirator face piece to generate and then maintain a constant negative pressure inside the face piece. The rate of air exhaust is controlled so that a constant negative pressure is maintained in the respirator during the fit test. The level of pressure is selected to replicate the mean inspiratory pressure that causes leakage into the respirator under normal use conditions. With pressure held constant, air flow out of the respirator is equal to air flow into the respirator. Therefore, measurement of the exhaust stream that is required to hold the pressure in the temporarily sealed respirator constant yields a direct measure of leakage air flow into the respirator. The CNP fit test method measures leak rates through the face piece as a method for determining the face piece fit for negative pressure respirators. The CNP instrument manufacturer Dynatech Nevada also provides attachments (sampling manifolds) that replace the filter cartridges to permit fit testing in an employee's own respirator. To perform the test, the test subject closes his or her mouth and holds his/her breath, after which an air pump removes air from the respirator face piece at a pre-selected constant pressure. The face piece fit is expressed as the leak rate through the face piece, expressed as milliliters per minute. The quality and validity of the CNP fit tests are determined by the degree to which the in-mask pressure tracks the test

exercise, the subject needs to hold head straight ahead and hold his or her breath for 10 seconds during the test measurement.

(2) Deep breathing. In a normal standing position, the subject shall breathe slowly and deeply for 1 minute, being careful not to hyperventilate. After the deep breathing exercise, the subject shall hold his or her head straight ahead and hold his or her breath for 10 seconds during test measurement.

(3) Turning head side to side. Standing in place, the subject shall slowly turn his or her head from side to side between the extreme positions on each side for 1 minute. The head shall be held at each extreme momentarily so the subject can inhale at each side. After the turning head side to side exercise, the subject needs to hold head full left and hold his or her breath for 10 seconds during test measurement. Next, the subject needs to hold head full right and hold his or her breath for 10 seconds during test measurement.

(4) Moving head up and down. Standing in place, the subject shall slowly move his or her head up and down for 1 minute. The subject shall be instructed to inhale in the up position (i.e., when looking toward the ceiling). After the moving head up and down exercise, the subject shall hold his or her head full up and hold his or her breath for 10 seconds during test measurement. Next, the subject shall hold his or her head full down and hold his or her breath for 10 seconds during test measurement.

(5) Talking. The subject shall talk out loud slowly and loud enough so as to be heard clearly by the test conductor. The subject can read from a prepared

REDON 1	Remove the respirator mask, loosen all facepiece straps, and then redon the

(c) After completing the test exercises, the test administrator must question each test subject regarding the comfort of the respirator. When a test subject states that the respirator is unacceptable, the employer must ensure that the test administrator repeats the protocol using another respirator model.

(d) Employers must determine the overall fit factor for each test subject by calculating the harmonic mean of the fit testing exercises as follows:

Where:
N = The number of exercises;

Appendix B – 2 Respiratory Cleaning Procedures

Appendix B – 2 to 1910.134: Respirator Cleaning Procedures (Mandatory)

These procedures are provided for employer use when cleaning respirators. They are general in nature, and the employer as an alternative may use the cleaning recommendations provided by the manufacturer of the respirators used by their employees, provided such procedures are as effective as those listed here in Appendix B- 2. Equivalent effectiveness simply means that the procedures used must accomplish the objectives set forth in Appendix B-2, i.e., must ensure that the respirator is properly cleaned and disinfected in a manner that prevents damage to the respirator and does not cause harm to the user.

I. Procedures for r 4C6 (e)-6 (d)-2 (ses)-5 (f)(r)-disises f3 (s)-1 P(ses)-5 (g)-4 ( )-5.yeee

l.-

E. Rinse components thoroughly in clean, warm (43 deg. C [110 deg. F] maximum), preferably running water. Drain. The importance of thorough rinsing cannot be overemphasized. Detergents or disinfectants that dry on facepieces may result in dermatitis. In addition, some disinfectants may cause deterioration of rubber or corrosion of metal parts if not completely removed.

F. Components should be hand-

Part A. Section I. (Mandatory)

The following information must be provided by every employee who has been selected to use any type of respirator (please print).

Employee ID: _____ Today's Date: _____

Last Name:_____ First Name:_____ M.I._____

Age: _____ Gender: Male / Female

Height: _____ft ____inch Weight: _____lbs

Company:_____ Location:_____

Department:_____ Supervisor: _____

Job Title/Occupation:_____

A phone number where you can be reached by the health care professional who reviews this questionnaire (include area code) ( )
_____

The best time to phone you at this number:_____

1. Has your employer told you how to contact the health care professional who will review this questionnaire (circle one) **YES** **NO**

2. Check the type of respirator you will use (you can check more than one category):
   a. _____ N, R, or P disposable respirator (filter mask, non-cartridge type)
   b. _____ Other type: Circle type(s): Half or Full Face Piece, Powered air-purifying, Self-contained breathing apparatus (SCBA).

3. Have you ever worn a respirator? (circle one): **YES** **NO**

If “Yes”, what type(s):

Part A. Section II. (Mandatory)

Questions 1 through 9 **must be answered by every employee who has been selected to use any type of respirator**. (Please circle “YES” or “NO” or check the appropriate box):

tMC I/(ojuTEMCT3 11Tf -0.004 Tc 0.004 Tw 3 0[(cu (r)-1 (5)-1 (5)-e4 (e)6 (o)-6 (e oyJ /T

Condition	Had in past	Have at Present	Never had
Heart Attack			
Stroke			
Angina			
Heart Failure			

Weakness in any of your arms, hands, legs, or feet		
Back pain		
Difficulty fully moving your arms and legs		
Pain or stiffness when you lean forward or backward at the waist		
Difficulty fully moving your head up or down		
Difficulty fully moving your head side to side		
Difficulty bending at your knees		
Difficulty squatting to the ground		
Climbing a flight of stairs or a ladder carrying more than 25 lbs.		
Any other muscle or skeletal problem that interferes with using a respirator? Explain:		

Part B.

ANY OF THE FOLLOWING QUESTIONS, AND OTHER QUESTIONS NOT LISTED, MAY BE

3. Have *you ever* worked with any of the materials, or under any of the conditions listed below?:

Condition	Yes	No
Asbestos		
Silica (e.g. in sandblasting)		
Tungsten/cobalt (e.g. grinding or welding this material)		
Beryllium		
Aluminum		
Coal (for example, mining)		
Iron		
Tin		
Dusty environments		
Any other hazardous exposures? If yes, explain exposures:		

4. List any second jobs or side businesses you have:

5. List your previous occupations:

6. List your current and previous hobbies:

7. Have you ever been in the military service? **YES** **NO**

   If "yes", were you exposed to biological or chemical agents (either in training or combat): **YES** **NO**

8. Have you ever worked on a HAZMAT team? **YES** **NO**

9. Other than medications for breathing and lung problems, heart trouble, blood pressure, and seizures mentioned earlier in this questionnaire, are you taking any other medications for any reason (including over the counter)? **YES** **NO**

10. Will you be using any of the following items with your respirator(s)?

Item	Yes	No
HEPA Filters		
Canisters (for example, gas masks)		
Cartridges		

11. How often are you expected to use the respirator(s):

Situation	Yes	No
Escape only (no rescue)		
Emergency rescue only		
Less than 5 hours per week		
Less than 2 hours per day		
2 to 4 hours per day		
Over 4 hours per day		

12. During the period you are using the respirator(s), is your work effort:

a. **Light** (less than 200 kcal per hour) **YES** **NO**
If "YES," how long does this period last during the average shift ___hrs ___mins

(Examples of a light work effort are: sitting while writing, typing, drafting, or performing Light

Appendix D – Information for Voluntary Respirator Use

(Mandatory) Information for Employees Using Respirators When Not Required Under the Standard

Appendix D to Sec. 1910.ppDf7

Respirator Users Approval Document

On / / , I do hereby attest that upon reviewing medical questionnaire and based on my
(date)
best medical judgment, is (initial all that apply):
(name)

Approved to wear the following respirators:

Filtering Face Piece (N-95 dust mask)

Escape Only Respirator

Half Mask Respirator

Full Mask Respirator

SCBA

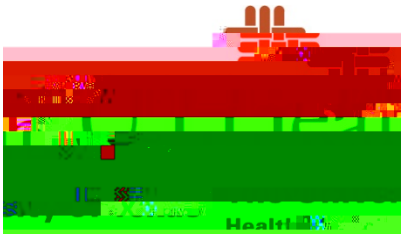

Environmental Health & Safety
Respiratory Protection

Record of Fit Test Completion and Training

On _____, _____ passed respiratory fit test for the following respirator(s):
(Date) (Printed Name)

3M N95 1860	3M N95 1870+	North 76008A Small	North 93000 Small
3M N95 1860S	PAPR only	North 76008A M/L	North 93000 M/L

The above user has received training in compliance with OSHA standard 29 CFR 1910.134, and is fit tested for only the above mask(s) per OSHA standard 29 CFR 1910.134 Appendix A.

Training

To ensure the proper and safe use of a respirator, the user was thoroughly trained at the time of initial fit test and annually thereafter, following an approved medical clearance. The training was conducted by Environmental Health & Safety (EH&S) at UTHealth. This training is documented and retained by EH&S. The provided training included, but was not necessarily limited to:

- Why the respirator is necessary – how improper fit, usage, or maintenance can compromise the protective effect of the respirator
- The respirator's capabilities and limitations
- How to use the respirator effectively in emergency situations, including situations in which the respirator malfunctions
- How to properly inspect, put on, seal check, use and remove the respirator
- What the procedures are for maintenance and storage of the respirator
- How to recognize medical signs and symptoms that may limit effective use of respirators
- Explanation of physical conditions that would require immediate fit testing
- The nature, extent, and effects of respiratory hazards in the workplace
- The need to inform supervisors of problems experienced by them or their coworkers
- Explanation of why particular type of respirator has been selected for specific respiratory hazard
- Successful completion of a fit test
- An opportunity to handle a respirator
- Demonstrate knowledge of the above training elements
- Employees who voluntarily use respirators will be given the advisory information from Appendix D of The UTHSC-H Respiratory Protection Manual located at http://www.uthouston.edu/safety/chemical-safety/

University of Texas Health Science Center at Houston

Y4 Tw 12 / Tw 1M-